



**Classic Series**

**SUNPORT C7 · 405-425W**  
MWT Mono PERC Half-Cut Module

**20.7%**  
20.7%

30-  
LLOYD'S & PICC Worldwide

: 5400Pa ( ) / 2400Pa

*LCOE:*

PV-

**12** **30**

**PICC LLOYD'S**  
**PICC LLOYD'S**

| Year | Performance (%) |
|------|-----------------|
| 1    | 97%             |
| 30   | 82.05%          |

1- 2%, 30- 82%.

- ★CQC Top Runner Advanced Technology Certification (4A class)
- ★ISO 9001:2015 Quality Management System
- ★ISO 45001: 2018 Occupation Health Safety Management System

- ★TUV NORD Certification
- ★ISO 14001:2015 Environment Management System

(STC)

|                |   | SPP405NH7H            | SPP410NH7H | SPP415NH7H | SPP420NH7H | SPP425NH7H |
|----------------|---|-----------------------|------------|------------|------------|------------|
| (Pm)           | W | 405                   | 410        | 415        | 420        | 425        |
|                | W |                       |            | 0~+5       |            |            |
| (Vm)           | V | 39.4                  | 39.6       | 39.8       | 40.0       | 40.2       |
| (Im)           | A | 10.28                 | 10.35      | 10.43      | 10.50      | 10.57      |
| (Voc)          | V | 48.0                  | 48.2       | 48.4       | 48.6       | 48.8       |
| (Isc)          | A | 10.66                 | 10.72      | 10.78      | 10.84      | 10.90      |
| ( m)           | % | 19.7                  | 20.0       | 20.2       | 20.5       | 20.7       |
| STC: AM = 1,5. |   | 1000 / <sup>2</sup> , | 25°        |            |            |            |

NMOT

|       |   | SPP405NH7H           | SPP410NH7H | SPP415NH7H | SPP420NH7H | SPP425NH7H |
|-------|---|----------------------|------------|------------|------------|------------|
| (Pm)  | W | 304                  | 308        | 312        | 316        | 320        |
| (Vm)  | V | 35.9                 | 36.1       | 36.3       | 36.5       | 36.7       |
| (Im)  | A | 8.47                 | 8.53       | 8.60       | 8.66       | 8.72       |
| (Voc) | V | 43.8                 | 44.0       | 44.2       | 44.4       | 44.6       |
| (Isc) | A | 8.81                 | 8.87       | 8.94       | 9.00       | 9.05       |
| NMOT: |   | 800 / <sup>2</sup> , | 20° ,      | 1 /        |            |            |


|  |           |
|--|-----------|
|  | 43±2°C    |
|  | -0.36%/°C |
|  | -0.28%/°C |
|  | 0.06%/°C  |

|  |        |           |
|--|--------|-----------|
|  | ( )    | ( )       |
|  | 40' HC | 682 / 726 |
|  |        | 31        |

|     |   |
|-----|---|
| ( ) | 2020 1016 35                              |
|     | 22.8                                      |
|     | /3.2                                      |
|     | 144(24x6) / Mono / 162.75mm(Half-cell)    |
|     | EVA                                       |
|     | /   |
|     | IP67 / IP68                               |
|     | 4mm <sup>2</sup> , 350mm (+) / 150mm (-); |
|     | MC4                                       |

|  |                   |
|--|-------------------|
|  | 1500V(TUV)        |
|  | 15A               |
|  | -40°C~+85°C       |
|  | 5000 ( )/2400 ( ) |
|  | 25 , 1            |
|  | 23 /              |
|  | Class A           |

(SPP420NH7H)

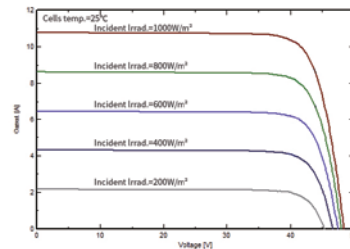

(SPP420NH7H)

